


TANK FITTINGS & ACCESSORIES




ADAPTERS, CLOSURES, CONNECTORS,
VACUUM BREAKERS, AND WRENCHES

Threaded Adapters (2.5"-8 NPSM)




Part Number	Adapt to ...	Material	Max. Temp.	Max. Pressure
TS-2751-3	3/4" NPT	PVC	120°F	150 PSI
SM-TR75258-G-FS	3/4" NPT	PVC	120°F	150 PSI
TS-2751-5	1" NPT	PVC	120°F	150 PSI
TS-2751-8	1-1/4" NPT	PVC	120°F	150 PSI
TS-2751-4	1-1/2" NPT	PVC	120°F	150 PSI
TS-2751-6	2-1/4"-16 UN	PVC	120°F	150 PSI
LC-D1170	2-1/4"-16	CELCON	—	—



Threaded Adapters (2.5"-8 NPSM) with Slotted Screen (0.010" Slots)

Part Number	Adapt to ...	Material	Max. Temp.	Max. Pressure
SM-BA75258	3/4" NPT	PVC	120°F	150 PSI
SM-BA1258	1" NPT	PVC	120°F	150 PSI




Threaded Adapters (2.5"-8 NPSM) for ECO-type Non-threaded Tank Openings


Part Number	Adapt to ...	Material	Max. Temp.	Max. Pressure
PA-TR258ECO	2-1/2"-8 NPSM	PVC	120°F	150 PSI

NOTE: Requires clamp (sold separately) to install.

Threaded Adapters (4"-8 UN)



Part Number	Adapt to ...	Material	Max. Temp.	Max. Pressure
SM-TR148	1" NPT	PVC	120°F	150 PSI
SM-TR12548	1-1/4" NPT	PVC	120°F	150 PSI
SM-TR1548	1-1/2" NPT	PVC	120°F	150 PSI
SM-TR248	2" NPT	PVC	120°F	150 PSI
SM-TR2548	2-1/2" NPT	PVC	120°F	150 PSI
TS-4821-6	1" NPT	CPVC	150°F	150 PSI
TS-4821-12	1-1/4" NPT	CPVC	150°F	150 PSI
TS-4821-7	1-1/2" NPT	CPVC	150°F	150 PSI
TS-4821-8	2" NPT	CPVC	150°F	150 PSI
TS-4821-17	2"-11.5 NPSM	CPVC	150°F	150 PSI
SM-TR25848 (with Chamfer Seal)	2-1/2"-8 UN	PVC	120°F	150 PSI
SM-TR25848-EG (with Face Seal)	2-1/2"-8 UN	PVC	120°F	150 PSI
TS-4821-2	2-1/2"-8 UN	CPVC	150°F	150 PSI
SM-TR25848PP	2-1/2"-8 UN	PP	150°F	150 PSI
LC-C610227	2-1/2"-8 UN	NORYL	150°F	150 PSI
TS-4821-4	3"-8 UN	CPVC	150°F	150 PSI




Threaded Adapters (4"-8 UN) with Slotted Screen (0.010" Slots)

Part Number	Adapt to ...	Material	Max. Temp.	Max. Pressure
SM-BA148	1" NPT	PVC	120°F	150 PSI

TANK FITTINGS & ACCESSORIES




ADAPTERS, CLOSURES, CONNECTORS,
VACUUM BREAKERS, AND WRENCHES




Threaded Adapters (6"-8 UN)

Part Number	Adapt to ...	Material	Max. Temp.	Max. Pressure
TS-4125-003	3" FNPT	NORYL	150°F	150 PSI
SM-TR468	4" FNPT	PVC	120°F	150 PSI
SM-TR4868	4"-8 UN	PVC	120°F	150 PSI




Threaded Couplers (2.5"-8 NPSM)

Part Number	Adapt to ...	Material	Max. Temp.	Max. Pressure
LC-Q1021	2.5"-8 x 2.5"-8	PVC	120°F	150 PSI
SM-TCM2582AS10 (with ABS Baskets)	2.5"-8 x 2.5"-8	High Impact Type-2 PVC	120°F	150 PSI
SM-TCM2582AS13 (with ABS Baskets)	2.5"-8 x 2.5"-8	High Impact Type-2 PVC	120°F	150 PSI



ANSI Flanged Adapters (4" ANSI)

Part Number	Adapt to ...	Material	Max. Temp.	Max. Pressure
TS-10673	2" NPT	CPVC	150°F	150 PSI
TS-10674	3" NPT	CPVC	150°F	150 PSI
TS-5276	3" NPSM	CPVC	150°F	150 PSI



SNA Flanged Adapters (6" SNA) — Machined


Part Number	Adapt to ...	Material	Max. Temp.	Max. Pressure
SM-FLGRD61	1" NPT	PVC	120°F	150 PSI
SM-FLGRD615	1-1/2" NPT	PVC	120°F	150 PSI
SM-FLGRD62	2" NPT	PVC	120°F	150 PSI
SM-FLGRD63	3" NPT	PVC	120°F	150 PSI
SM-FLGRD64N	4" NPT	PVC	120°F	150 PSI
TS-10659	1" NPT	CPVC	150°F	150 PSI
TS-10660	1-1/2" NPT	CPVC	150°F	150 PSI
TS-10661	2" NPT	CPVC	150°F	150 PSI
TS-10662	3" NPT	CPVC	150°F	150 PSI
TS-10663	4" NPT	CPVC	150°F	150 PSI
SM-FLGRD64N-C	4" NPT	CPVC	150°F	150 PSI
SM-FLGRD63S	3" Socket	PVC	120°F	150 PSI
SM-FLGRD64S	4" Socket	PVC	120°F	150 PSI
SM-FLGRD63S-C	3" Socket	CPVC	150°F	150 PSI
SM-FLGRD64S-C	4" Socket	CPVC	150°F	150 PSI
SM-FLGRD64	4"-8 UN	PVC	120°F	150 PSI
SM-FLGRD64-A (without SS Hardware)	4"-8 UN	PVC	120°F	150 PSI
SM-FLGRD64-C	4"-8 UN	CPVC	150°F	150 PSI

TANK FITTINGS & ACCESSORIES



ADAPTERS, CLOSURES, CONNECTORS,
VACUUM BREAKERS, AND WRENCHES

SNA Flanged Adapters (6" SNA) — Molded




Part Number	Adapt to ...	Material	Max. Temp.	Max. Pressure
TS-5292 *	3" NPT x 3" NPT	NORYL	150°F	150 PSI
TS-5267	3" NPT x 3" NPT	NORYL	150°F	150 PSI
LC-C610222	3" NPT x 3" NPT	NORYL	150°F	150 PSI
TS-5295	3" NPT x 4"-8 UN	NORYL	150°F	150 PSI
LC-C610223	3" NPT x 4"-8 UN	NORYL	150°F	150 PSI
TS-10566 **	4"-8 UN	NORYL	150°F	150 PSI
LC-C610225	4"-8 UN	NORYL	150°F	150 PSI

* Bottom adapter with brine drain ports.


** Without internal 3 inch NPT section.

Manway Adapters (16" Manway)




Part Number	Adapt to ...	Material	Max. Temp.	Max. Pressure
TS-10108	2" NPT	Vinylester	150°F	150 PSI
TS-10582	2" NPT	CPVC	150°F	100 PSI
TS-11294	3" NPT x 3" NPT	CPVC	150°F	100 PSI
TS-10584	4" NPT	CPVC	150°F	100 PSI

Threaded Closures



Part Number	Opening	Material	Max. Temp.	Max. Pressure
LC-Q7006	1-1/4" NPSM	Polyglass	120°F	150 PSI
TS-2751-1	2-1/2"-8 NPSM	PVC	120°F	150 PSI
SM-CL258	2-1/2"-8 NPSM	PVC	120°F	150 PSI
LC-Q7004	2-1/2"-8 NPSM	ABS	120°F	120 PSI
SM-CL48	4"-8 UN	PVC	120°F	150 PSI
TS-4821-1	4"-8 UN	CPVC	150°F	150 PSI
LC-C610226	4"-8 UN	NORYL	150°F	150 PSI
SM-CL6	6"-8 UN	PVC	120°F	150 PSI
TS-2695-1	6"-8 UN	CPVC	150°F	150 PSI

Flanged Closures




Part Number	Opening	Material	Max. Temp.	Max. Pressure
TS-5259	4" ANSI	CPVC	150°F	150 PSI
TS-10472	4" ANSI	ACRYLIC	—	—
TS-10658	6" SNA	CPVC	150°F	120 PSI
TS-5296	6" SNA	NORYL	150°F	150 PSI
LC-C610224	6" SNA	NORYL	150°F	150 PSI

TANK FITTINGS & ACCESSORIES



ADAPTERS, CLOSURES, CONNECTORS,
VACUUM BREAKERS, AND WRENCHES

Flex Connector Assembly (NPT x NPT)




Part Number	Description	Max. Temperature	Max. Pressure
NI-5285	2" MNPT x 2" MNPT, 14" Overall Length	180°F	150 PSI
NI-5286	3" MNPT x 3" MNPT, 14" Overall Length	180°F	150 PSI
TS-5285	2" MNPT x 2" MNPT, 12" Overall Length	180°F	150 PSI
TS-5286	3" MNPT x 3" MNPT, 13" Overall Length	180°F	150 PSI

Straight Connector




Part No.	Description
TS-5045	3" NPSM x 3" NPT (CPVC) 150 PSI / 150°F

Elbow Connector



Part No.	Description
TS-5201	2" NPSM x 2" Slip (CPVC) 150 PSI / 150°F


Vacuum Breakers



Part Number	Description	Max. Temperature	Max. Pressure
SM-VB-34SP-CPVC	3/4" Spigot, machined CPVC body	160°F	150 PSI
TS-10725	1" FNPT, molded glass-filled PP body	180°F	100 PSI
TS-10724	1-1/2" MNPT, machined PVC body	120°F	125 PSI
SM-VB4P	1-1/2" MNPT, machined PVC body	120°F	125 PSI
SM-VB4P-CPVC	1-1/2" MNPT, machined CPVC body	160°F	150 PSI
SM-VB4P-SPIG	1-1/2" Spigot, machined PVC body	120°F	125 PSI
SM-VB4P-CPVC-SPIG	1-1/2" Spigot, machined CPVC body	160°F	150 PSI

Wrenches

Part No.	Description
TS-6568-2	4" Closure (4825-1)
TS-7729	6" Closure (2695-1)

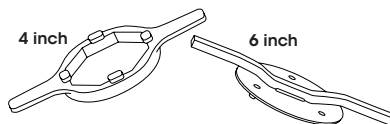

Brass Side Adapter



Part Number	Description	Max. Temperature	Max. Pressure
TS-1661	3/4" MNPT x 3/4" FNPT	150°F	150 PSI